


DS dynatec : Vérin rotatif/ Rotary actuator

Groupe TXCOM - DS dynatec, 10 avenue Descartes, 92 350 Le Plessis Robinson- www.ds-dynatec.com

Type: Hydraulique à palette(s)/ Hydraulic vane

Produit/ product: HPSP 9020 100 à 150°

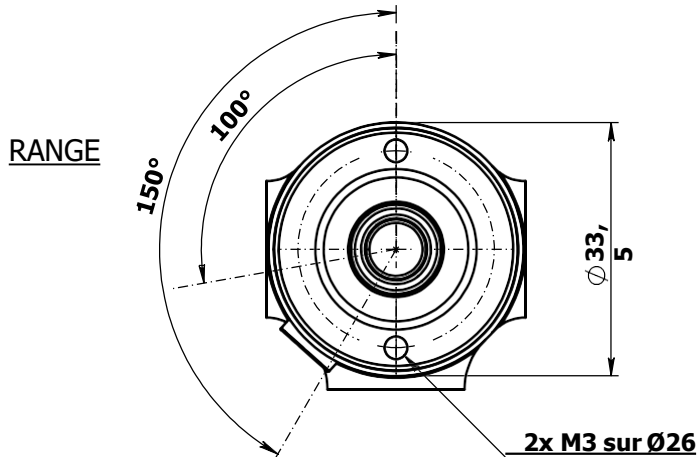

Caractéristiques générales Characteristics

Fluide/ Fluid: Huile minérale/ Mineral oil
Pression nominale d'utilisation/ Nominal operating pressure: 35 bar
Pression d'épreuve/ test pressure: 50 bar
Pression de décollement/ Breakaway pressure: <3.5 bar

Couple à 35 bar/ Torque at 35 bar: 3.5 Nm
Fuite interne/ Internal Leakage: 20 ml/min @ 35 bar

Masse/ Weight: 127 g





Cylindrée/ Displacement: 0.018 cm³/°
Temp. d'utilisation: -40°C / +70°C

Arbre/ Shaft: Inox

Corps/ Body: Aluminium anodisé dur/ Hard aluminium anodized

Flasques/ Flanges: Aluminium anodisé dur/ Hard anodized aluminium

Joints/ Seals: Nitrile

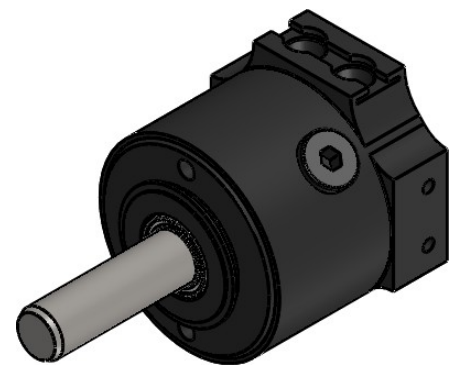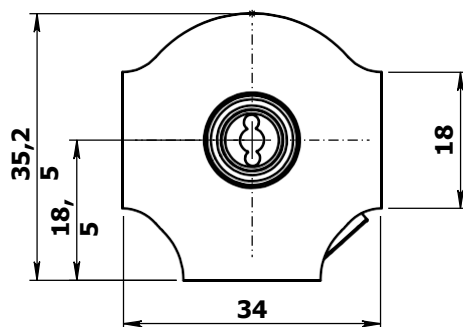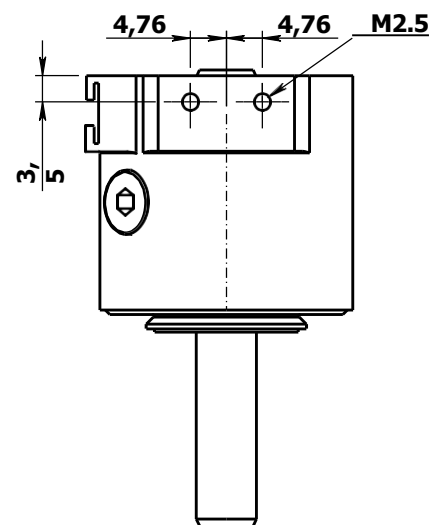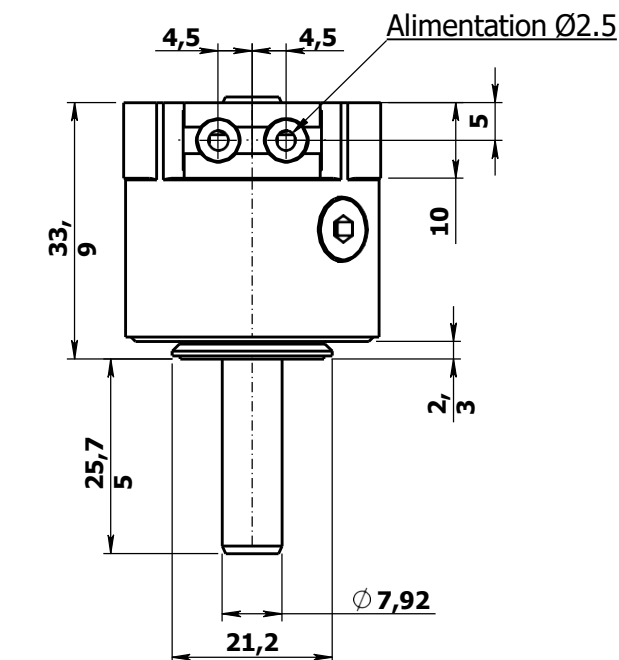

Modele CAO disponible sur demande.
CAD model available on request.

© Groupe TXCOM - Tout droits réservés - All rights reserved

Proprietary and confidential information of TXCOM Group. Reproduction and use are limited under applicable non-disclosure and non-use terms and conditions. All copies remain the property of TXCOM Group.