

DS dynatec : Vérin rotatif/ Rotary actuator

Groupe TXCOM - DS dynatec, 10 avenue Descartes, 92 350 Le Plessis Robinson- www.ds-dynatec.com

Type: Hydraulique à palette(s)/ hydraulic vane

Produit/ product: HPSD 9030 270°

Caractéristiques générales/ Caracteritics



Fluide/ fluide: Huile minérale/ mineral oil
Pression nominale d'utilisation/ Nominal operating pressure: 200 bar
Pression d'épreuve/ Test pressure: 250 bar
Pression de décollement/ Breakaway pressure: 3 bar

Couple à 200 bar/ Torque at 200 bar: 130 Nm
Fuite interne/ Internal leakage: 45ml/min @ 100 bar
Masse/ Weight: 3298 g



Cylindrée/ Displacement: 0.128 cm³/°
Temp. d'utilisation/ Temps of use: -40°C / +70°C

Arbre/ Shaft : Acier/ Steel Inox APX4
Corps/ Body: Acier/ Steel Inox APX4
Flasques/ Flanges: Acier/ Steel Inox APX4

Joints/ seals nitrile et/and PTFE.

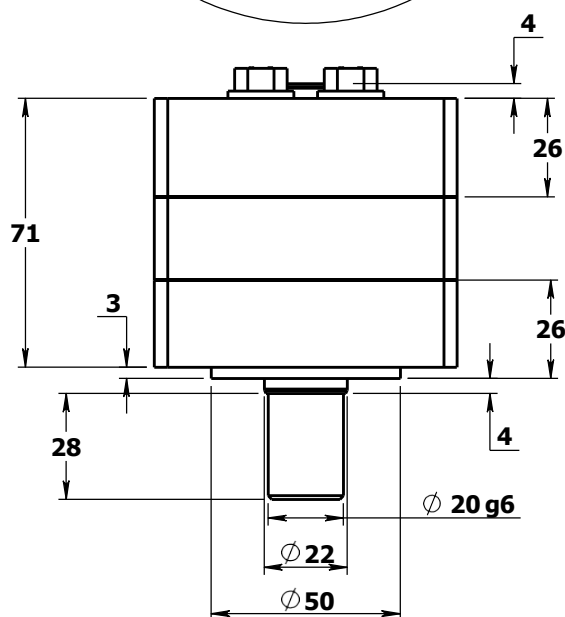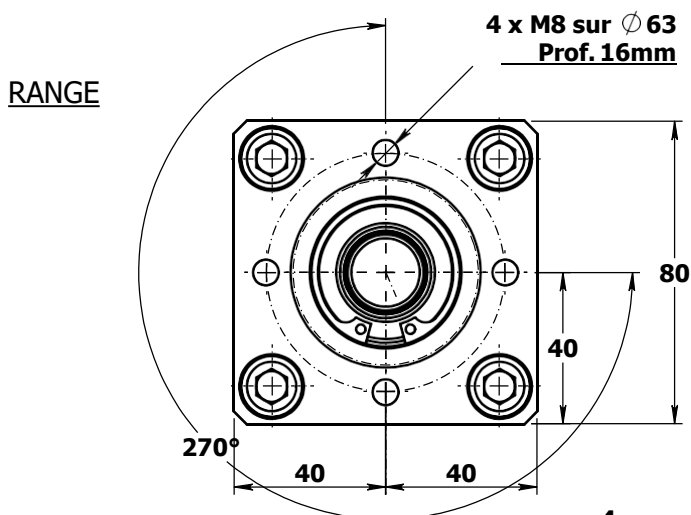

Alimentation 2x1/8"
Gaz Cylindrique

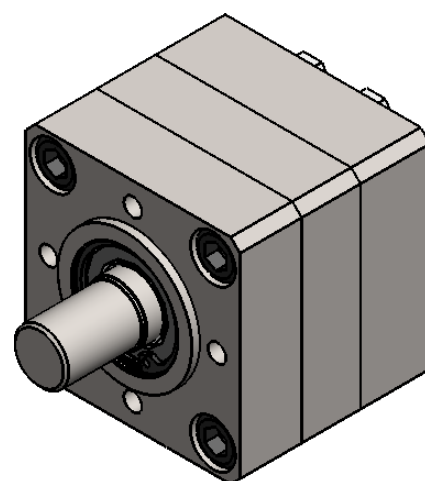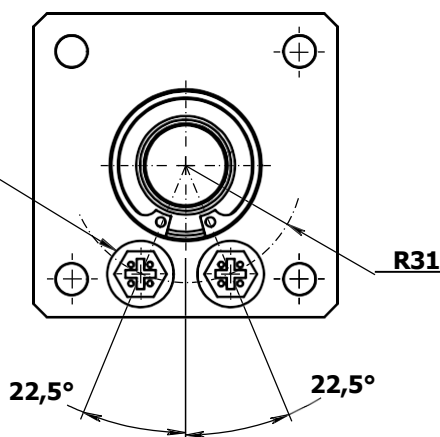

Modele CAO disponible sur demande.
CAD model available on request.

© Groupe TXCOM - Tout droits réservés - All rights reserved

Proprietary and confidential information of TXCOM Group. Reproduction and use are limited under applicable non-disclosure and non-use terms and conditions. All copies remain the property of TXCOM Group.