
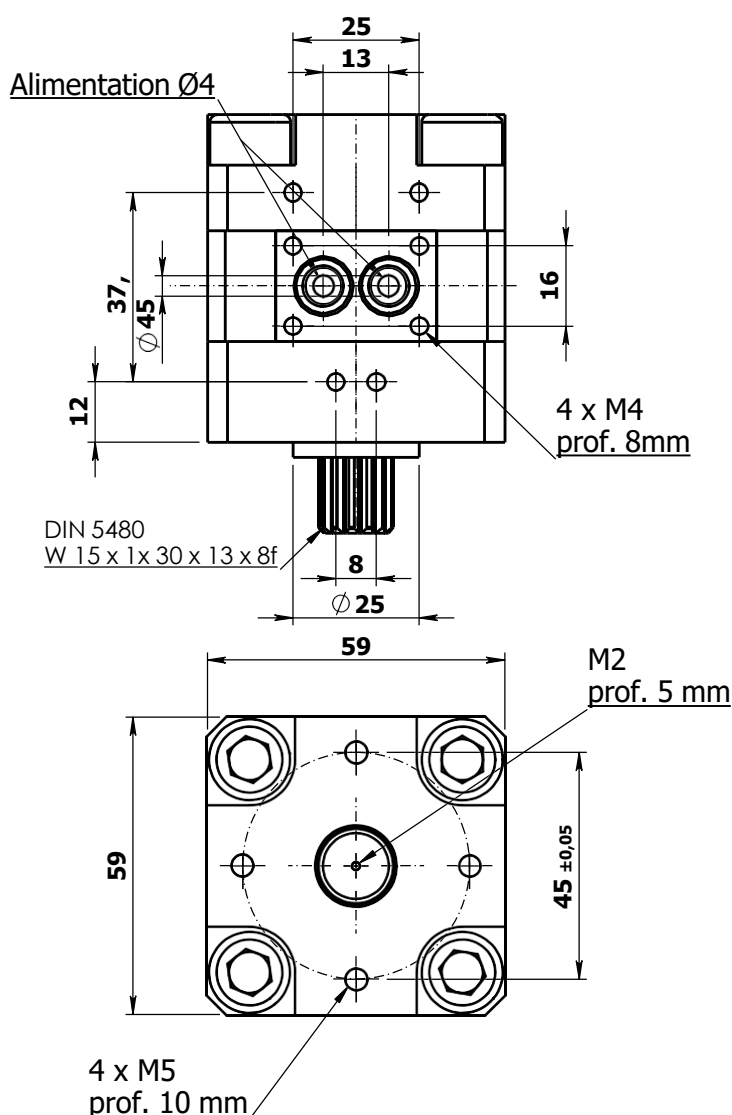


DS dynatec : Vérin rotatif/ Rotary actuator

Groupe TXCOM - DS dynatec, 10 avenue Descartes, 92 350 Le Plessis Robinson- www.ds-dynatec.com

Type: Hydraulique à palette(s)/ hydraulic vane

Produit/ Product: HPSD 9076 100°

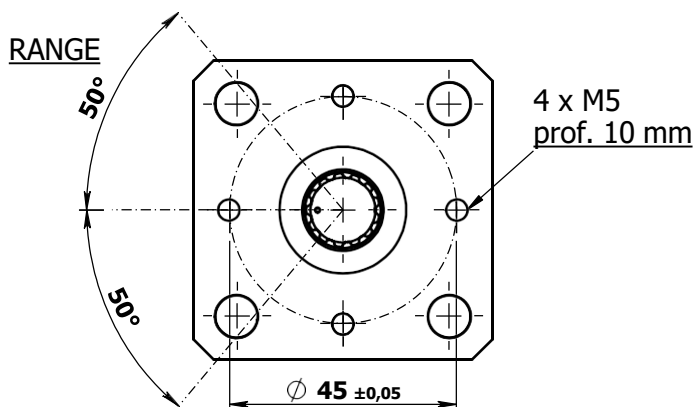

Caractéristiques générales/ Characteristics

Fluide/ Fluide: Huile minérale/ Mineral oil
Pression nominale d'utilisation/ Nominal operation pressure: 200 bar
Pression d'épreuve/ Test pressure: 300 bar
Pression de décollement/ Breakaway pressure: 2 bar

Couple à 200 bar/ Torque at 200 bar: 120Nm

Fuite interne/ Internal leakage: 25 ml/min @ 100 bar

Masse/ Weight: 986.79 g



Cylindrée/ Displacement: 0.118 cm³/°
Temp. d'utilisation/ Temp. of use: -10°C / +70°C

Arbre/ Shaft: Acier inox APX4/ Steel Inox APX4

Corps/ Body: Acier inox APX4/ Steel Inox APX4

Flasques/ Flanges: Aluminium anodisé/ anodized aluminium

Joints/ seals nitrile et/and PTFE

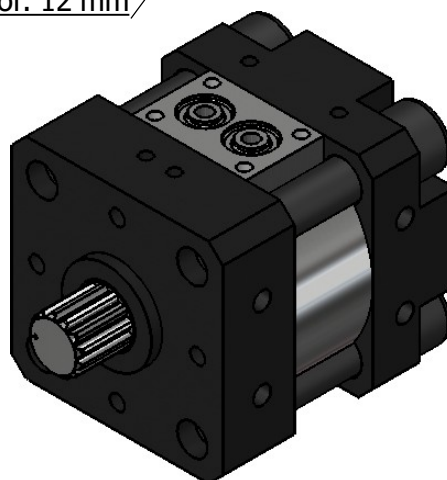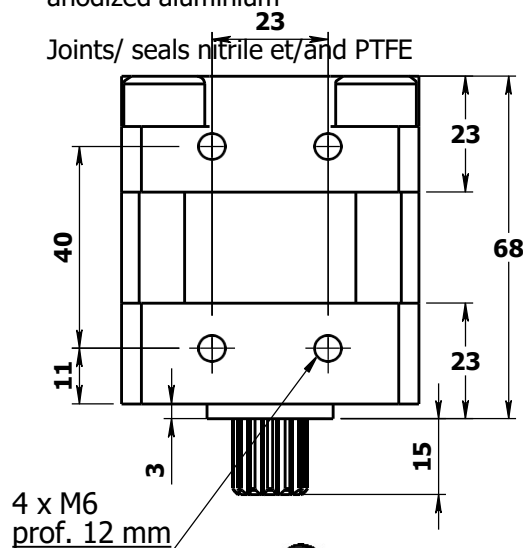

Modele CAO disponible sur demande.
CAD model available on request.

© Groupe TXCOM - Tout droits réservés - All rights reserved

Proprietary and confidential information of TXCOM Group. Reproduction and use are limited under applicable non-disclosure and non-use terms and conditions. All copies remain the property of TXCOM Group.