
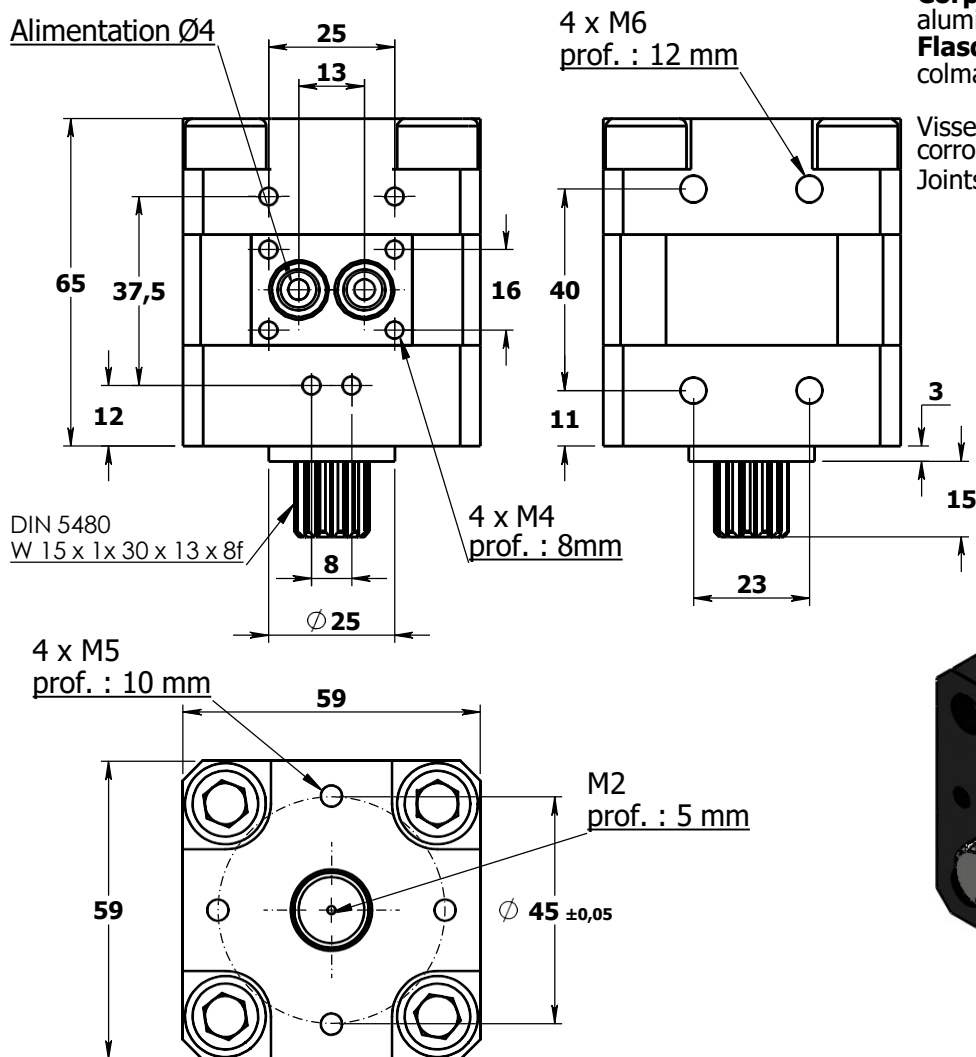


DS dynatec : Vérin rotatif/ Rotary actuator

Groupe TXCOM - DS dynatec, 10 avenue Descartes, 92 350 Le Plessis Robinson- www.ds-dynatec.com

Type: Hydraulique à palette(s)/ Hydraulic vane

Produit: HPSP 9076 MP 280°

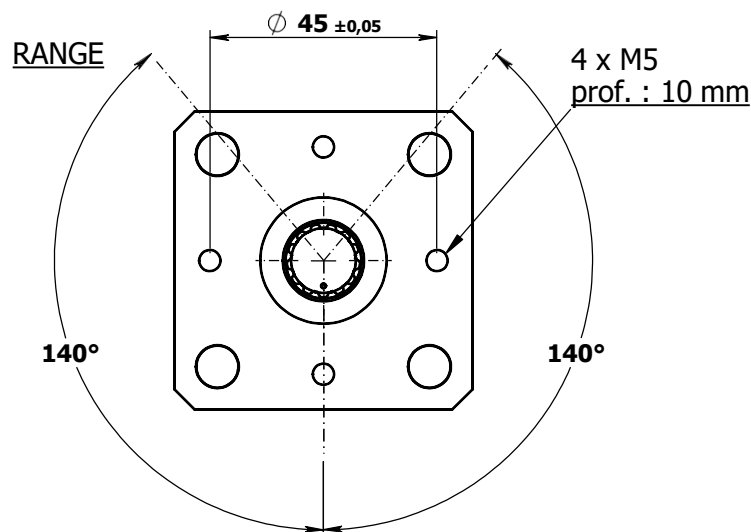

Caractéristiques générales Characteristics

Fluide/ fluid: Huile minérale ou pneumatique/ miner oil or pneumatic

Pression nominale d'utilisation/ Nominal operating pressure: 160 bar

Pression d'épreuve/ Test pressure: 200 bar

Pression de décollement/ Breakaway pressure: 3 bar

HPSP 9076 MP

Couple à/ torque at 200 bar: 60 Nm

Rotation: 280°

Fuite interne/ Internal leakage: 20 ml/min @ 100 bar

Masse/ Weight: 777.92 g

Cylindrée/ Displacement: 0.059 cm³/°

Temp. d'utilisation/ temp. of use: -40°C / +70°C


Arbre/ Shaft: Acier/ Steel Inox APX4

Corps/ body: Aluminium anodisé dur colmatés/ hard aluminium anodized

Flasques/ Flanges: Aluminium anodisé dur colmatés/ Hard aluminium anodized

Visserie traitée anti-corrosion/ Screws with anti-corrosion

Joints/ Seals nitrile ou/ or viton (à définir/ to define)

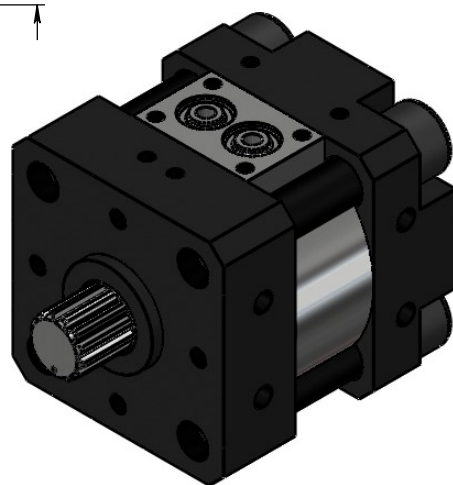

Modele CAO disponible sur demande.
CAD model available on request.

© Groupe TXCOM - Tout droits réservés - All rights reserved

Proprietary and confidential information of TXCOM Group. Reproduction and use are limited under applicable non-disclosure and non-use terms and conditions. All copies remain the property of TXCOM Group.