

DS dynatec : Vérin rotatif/ Rotary actuator

Groupe TXCOM - DS dynatec, 10 avenue Descartes, 92 350 Le Plessis Robinson- www.ds-dynatec.com

Type: Hydraulique à palette(s)/hydraulic vane

Produit/ Product: HPSD 9082 (280°)

Caractéristiques générales Characteristics

Fluide/Fluid : Huile minérale/mineral oil
Pression maximale de service/Max. operating pressure: 140 bar
Pression d'épreuve/test pressure: 140 bar
Pression de décollement/ Breakaway pressure: 5 bar



Couple à 140 bar/ Torque at 140 bar : 1150 Nm
Fuite interne/Internal leakage : 100 ml/min @ 100 bar
Masse/ Weight: 9750 g

Cylindrée/ Displacement: 1.60 cm³/°
Temp. d'utilisation/ temp of use: -10°C / +70°C

Arbre/ Shaft: Acier inox APX4/ Steel Inox APX4
Corps/ Body: Aluminium anodisé/ anodized aluminium

Flasques/ Flanges: Aluminium anodisé/ anodized aluminium

Joint/ seals nitrile or/ou viton
 (à définir/ to be defined)

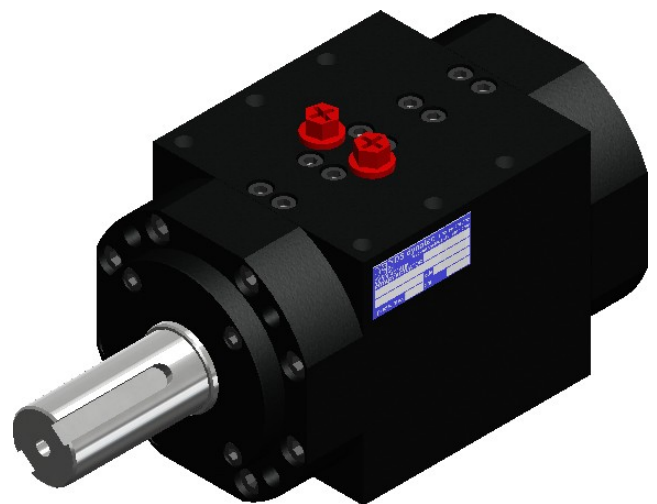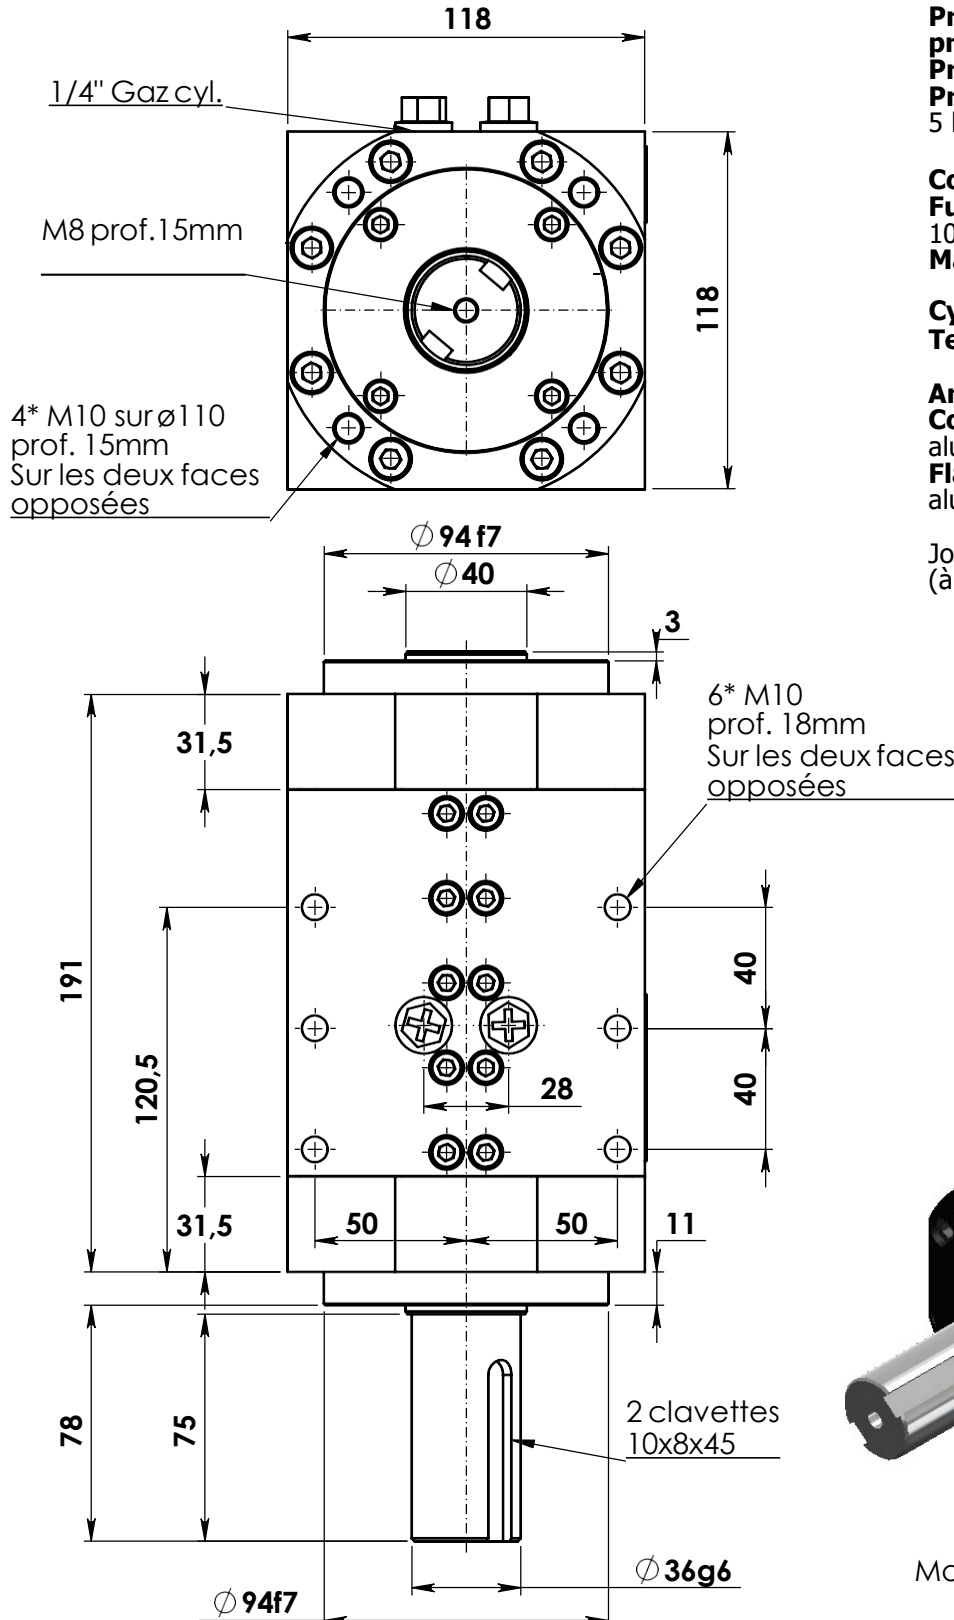

Modèle CAO disponible sur demande.
 CAD model available on request

© Groupe TXCOM - Tout droits réservés - All rights reserved

Proprietary and confidential information of TXCOM Group. Reproduction and use are limited under applicable non-disclosure and non-use terms and conditions. All copies remain the property of TXCOM Group.